

Compare Clusters


What is Compare clusters?

Compare clusters is a tool to identify the optimal number of clusters for [K-means Clustering](#) using the Davies-Bouldin index. The Davies-Bouldin index is a measure of cluster quality where a lower value indicates better clustering, i.e., the separation between points within the clusters is low (tight clusters) and separation between clusters is high (distinct clusters).

Running Compare clusters

We recommend normalizing your data prior to running *Compare clusters*, but the task will run on any counts data node.

- Click the counts data node
- Click the **Exploratory analysis** section of the toolbox
- Click **Compare clusters**
- Configure the parameters
- Click **Finish** to run (Figure 1)

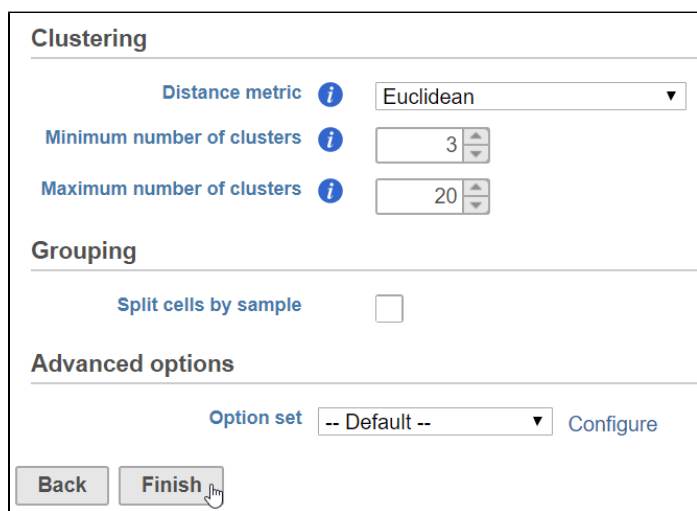

The screenshot shows the 'Clustering' configuration dialog for the 'Compare clusters' task. It is divided into three sections: 'Clustering', 'Grouping', and 'Advanced options'. In the 'Clustering' section, the 'Distance metric' is set to 'Euclidean' (with an information icon), the 'Minimum number of clusters' is set to 3, and the 'Maximum number of clusters' is set to 20. The 'Grouping' section has a 'Split cells by sample' checkbox which is currently unchecked. The 'Advanced options' section shows an 'Option set' dropdown menu set to '-- Default --' with a 'Configure' link next to it. At the bottom of the dialog are two buttons: 'Back' and 'Finish'.

Figure 1. *Compare clusters* configuration dialog

The parameters for *Compare clusters* are the same as for [K-means clustering](#).

Compare clusters task report

The *Compare clusters* task report is an interactive line chart with the number of clusters on the x-axis and the Davies-Bouldin index on the y-axis (Figure 2).

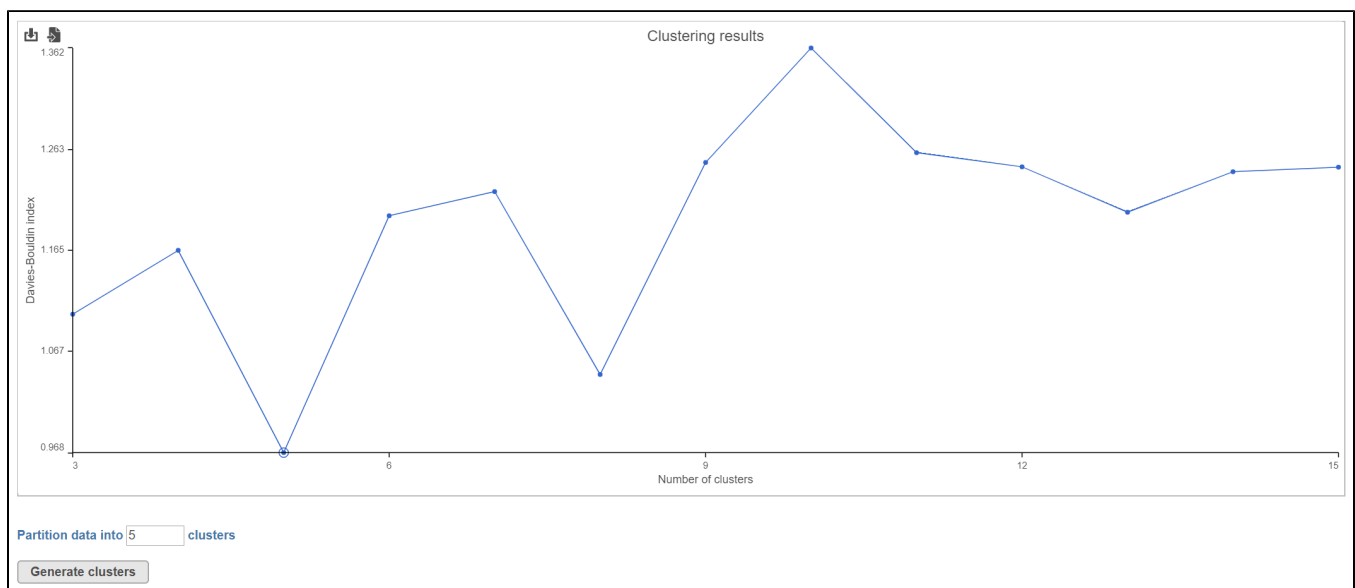


Figure 2. The *Compare clusters* task report shows the Davies-Bouldin index for each number of clusters.

The *Compare clusters* task report can be used to run *K-means clustering*.

- Click a point on the plot to select it or type the number of clusters in the text box *Partition data into* clusters

Selecting a point sets it as the number of clusters to partition the data into. The number of clusters with the lowest Davies-Bouldin index value is chosen by default.

- Click **Generate clusters** to run *K-means clustering* with the selected number of clusters

A *K-means clustering* task node and a *Clustering result* data node are produced. Please see our documentation on [K-means Clustering](#) for more details.

Additional Assistance

If you need additional assistance, please visit [our support page](#) to submit a help ticket or find phone numbers for regional support.



Your Rating:



Results:



22 rates